

TECHNICAL DATA SHEET

Flex Kurb™

Designed for roadway border applications, parking stalls, directing traffic flow, traffic circles, temporary or permanent installations, etc., where high visibility and curvatures are requirements.



Modular sections link together and are anchored into concrete forming a sturdy curb structure. The semi-ridged Flex Kurb can be curved to meet nearly all location requirements. Pre-molded angled corners (i.e. 45, 60, 90, etc., or specify angle) are available.



Available in solid Black; Black w/ Yellow or White molded-in markings. Additional options include 3" x 36" Flexible Delineators.


FLEX KURB SPECIFICATIONS

- Each module has two flat sides and one rounded side
- Each module measures 6" wide at the base, 36" in length, 5" in height and weighs 28 Lbs
- Each module is black in color and has the following options: Two yellow or white molded-in markings that are considered integral to the module


FLEX KURB MATERIAL SPECIFICATIONS

- Each component is manufactured from 100% recycled rubber with polyurethane binder
- The rubber in fiber form contains no rubber dust, granules or fly that will weaken the product
- They are black in color
- They are compression molded and have the following properties:


- Tensile Strength 500 psi
- Hardness 65 Shore A
- Specific Gravity 1.13
- Skid Resistance 89 (Dry)
- Deform Rate None (100% Recovery)
- Chemical Resistance Impervious to engine oil, road salts, transmission fluid, anti-freeze, gasoline/diesel fuel, solvents, outdoor exposure including extreme hot or cold temperatures.
- Conformable to pavement variances without curling.

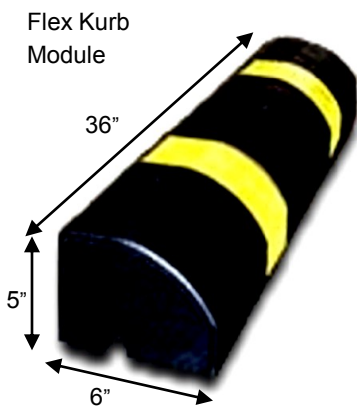


Flexible Kurbing with optional delineators

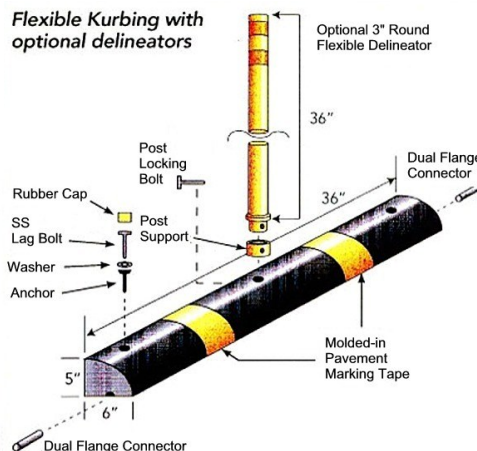

Installation Hardware Kit included with every Module and consists of a 1 Connector, 3 Bolts, 3 Washers, 3 Black Bolt Caps and 3 Anchors.

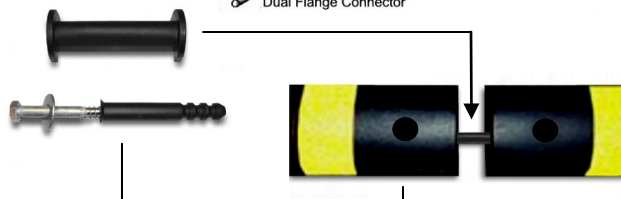

Flex Kurb 90° Corner Module

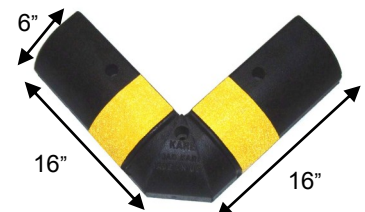

Additional Angles are available

All Road Kare manufactured products have a two year limited warranty against defects in material and workmanship.

ALL RIGHTS RESERVED